


# ESPintelligent

## CHQ-DRC2(SCI)

### ANALOGUE DUAL RELAY CONTROLLER

#### Features

- ▶ Loop powered
- ▶ Single loop address
- ▶ 2 Independently controlled changeover relays
- ▶ Relays contact rated at 30 VDC at 1 A
- ▶ Auxiliary monitored input
- ▶ DIN-Rail version available
- ▶ Both models feature an integral short-circuit isolator
- ▶ Both models approved by LPCB
- ▶ SIL Level 2 approved variant available.

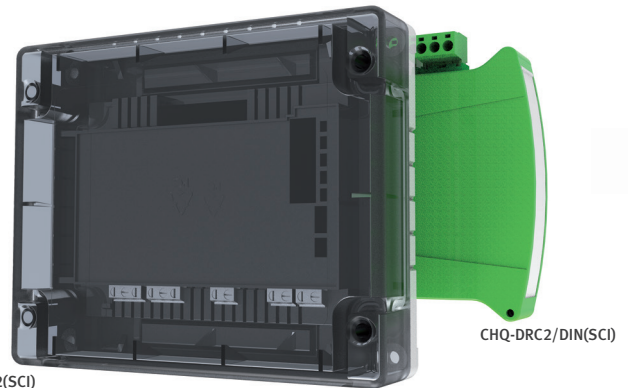

#### Description

Model CHQ-DRC2(SCI) is a Dual Relay Controller designed to provide two general-purpose relay outputs, each output can be driven separately for control of such devices as dampers or for control of plant and equipment shutdown. The monitored input can be used for local power supply fault monitoring or as a general-purpose input.

The unit is also available as a DIN Rail mountable version; both models feature an integral short-circuit isolator. The CHQ-DRC2(SCI) utilises simple DIL switches for reliable addressing. A back box is also available (CHQ-BACKBOX) which, when used in conjunction with the CHQ-DRC2(SCI), increases the IP rating to IP65.

#### Specification

| Order codes*1                 |  | CHQ-DRC2(SCI)         | (module with SCI)   |
|-------------------------------|--|-----------------------|---|
|                               |  | CHQ-DRC2(HFP)-SCI     |   |
|                               |  | CHQ-DRC2/DIN(SCI)     | (DIN module with SCI)   |
|                               |  | CHQ-DRC2/DIN(HFP)-SCI |   |
| Operating Voltage             | 17 - 41 VDC  |                       |   |
| Low Power Mode (0.75s)        | 170 µA   |                       |   |
| Quiescent current             | 300 µA   |                       |   |
| Current consumption           | 22 mA ± 20 % (polling)   |                       |   |
| Current in short-circuit      | 8 mA   |                       |   |
| Maximum short-circuit current | 1 A (loop)   |                       |   |
| Relay Contact Rating          | 30 VDC max, 1 A (resistive load)   |                       |   |
| Input E.O.L. resistor         | 10 kΩ, ±5%, 0.25 W   |                       |   |
| Input threshold level         | ON=470 Ω, Short cct <50 Ω, Open cct >100 KΩ  |                       |   |
| Operating Temperature Range   | -10 °C to +50 °C   |                       |   |
| Storage Temperature Range     | -30°C to + 60 °C   |                       |   |
| Maximum Humidity              | 95%RH Non Condensing (at 40°C)   |                       |   |
| Weights (g) & Dimensions (mm) | Module Enclosure   | 343                   | L=157 x W=127 x D=35 (Module & Lid) D=79 (Module, Lid & CHQ-BACKBOX)<br>(add 235 to module weight when using CHQ-BACKBOX) |
|                               | DIN Enclosure  | 124                   | L=119 x W=108 x D=24  |
| Colour and enclosure material | CHQ Module & CHQ-BACKBOX White ABS, DIN Module Green ABS, Module Lid Semi-Opaque Black ABS as standard (white version – CHQ-LID(WHT) also available) |                       |   |

\*1 Fire alarm control panel compatibility required for these products.

For further information visit [www.hochikieurope.com/esp](http://www.hochikieurope.com/esp)

Hochiki Europe (UK) Ltd. Reserves the right to alter the specification of its products from time to time without notice. Although every effort has been made to ensure the accuracy of the information contained in this document it is not warranted or represented by Hochiki Europe (UK) Ltd. To be a complete and up-to-date description.