


Freedor Pro Data Sheet

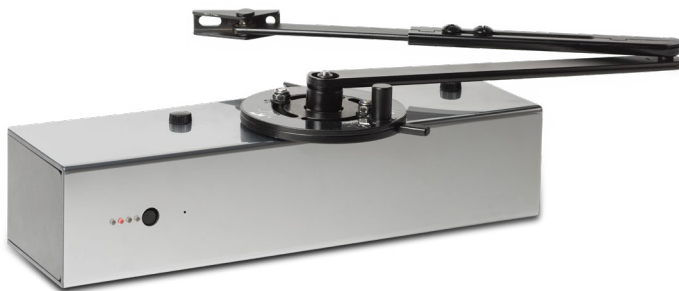

Information

Installer exclusive Freedor Pro takes the weight out of heavy fire doors and allows you to keep them placed open at any angle with its free-swing feature.

In the event of an emergency, the radio Transmitter activates the Freedor Pro to close all doors, preventing the spread of smoke and fire.

Part number

338-0604 Freedor Pro

Technical information

Power	9V Alkaline battery pack
Expected battery life	5 years
Colour	Silver
Length	320mm
Height	65mm (105mm with arm)
Depth	95mm
Weight	4.2kg
Installation position	Top of the door
Activation	Radio signal from Fireco Transmitter
Warranty	Five years
Casing	Acrylic
Radio frequency	433 MHz
Range	Typical internal range 40-50m
Classification	Suitable for critical category (A) under BS7273-4 2015
Hold open	Place open at any angle using free-swing feature
Power size	Power size 3 (max of 60kg and 950mm width)
Audible warning	Yes
Fire rating	Freedor has been tested to EN 1634 on FD30 doorsets, exposed and unexposed faces
Independently tested to	EN 1154, EN 1155, EN 1634-1 ETSI EN 300 220-1, ETSI EN 300 220-2 EN 50130-4:2011+A1:2014